

# Vitrum One Plus Single Shutter


## Datasheet

### DESCRIPTION

Vitrum One Plus Single Shutter is a Z-Wave Plus flush actuator for embedding or junction boxes, to be used in association with satellite buttons.

### TECHNICAL AND AESTHETIC SPECIFICATIONS

	A
<b>Power Supply</b>	110 - 240 VAC $\pm$ 10% 50 / 60 Hz
<b>Reated load current of AC output (resistive load )</b>	2 X 4 A / 240 VAC
<b>Output circuit power of AC output (resistive load)</b>	2 X 920 W (240 VAC)
<b>Power measurement accuracy</b>	P = 0-200 W, $\pm$ 2 W P > 200 W, $\pm$ 3%
<b>Digital temperature sensor range (sensor must be ordered separately)</b>	-25°C~+80°C (-13~ 176°F), resolution 0.1°C
<b>Operation temperature</b>	-10° ~ +40°C (14 ~ 104°F)
<b>Distance</b>	up to 30 m indoors (98 ft) (depending on building materials)
<b>Dimensions (WxHxD)</b>	41.8 x 36.8 x 16.9 mm / 1,65x1,45x0,66 in
<b>(packaging)</b>	74 x 43 x 86 mm / 2,91x1,69x3,39 in
<b>Weight (including packaging)</b>	28 g (54 g) / 0.98oz (1.90oz)
<b>Electricity consumption</b>	0.4 W
<b>For installation in boxes</b>	$\varnothing \geq 60$ mm (2,36 in) or 2M depth $\geq 60$ mm (2,36 in)
<b>Switching</b>	Relay (2x)

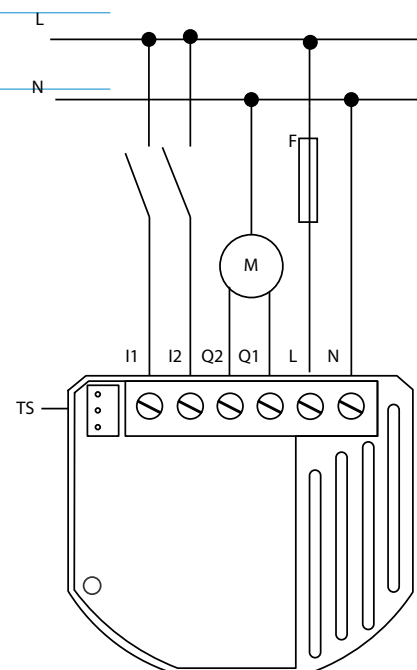

	Device	Code (Electronic)	Region	Frequencies
A	Vitrum One Plus Dimmer	9000271	EU	868,4 MHz

