


Vitrum I BS Satellite Wireless

Datasheet

cod. 01B010030

vitrum.com

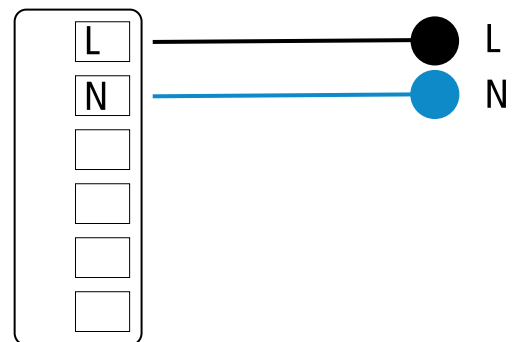

certified product

FUNCTIONAL SPECIFICATION

- One-button light switch
- Touch control with capacitive technology and concave surface for tactile Feedback
- Acoustic feedback signal
- Crown backlit by low-consumption LEDs

MECHANICAL CHARACTERISTICS

- Box British 1 Gang wall or plasterboard
- Dimension: 95x95mm
- Depth at sight: 8 mm
- Operating temperature: 0-40°C
- Button Diameter: 38 mm
- Light ring diameter: 42 mm
- Weight: 180 g.

COMMAND MODE

- One capacitive button with "On-Off" control
- Dimming touch:
 - Single short pressure for "On-Off"
 - Keeping pressure: light increase from 0 to 100%
- Dimmering by circular touch (iPOD like control) (increasing with clockwise touch, decreasing with counterclockwise touch)

ELECTRICAL CHARACTERISTICS

- Power: 230V ac
- Energy consumption: < 1W
- Configuration: 2 wires
- Frequency of communication: F.M. 868.4MHz - R.F. radiated power < 1mW
- R.F. Range: 20 m. MAX (open field)

Built in compliant with:

E.M.C.: 2004/108/CE

R&TTE: 1999/5/CE

Think Simple s.r.l.

Size, color tone and characteristics of the products shown are only indicative and do not constitute any contractual bond. Think Simple s.r.l. reserves the right to modify its products at any time and without notice in order to better their quality and functionality.

HEAD OFFICE

Viale Lino Zanussi, 3
33170 Pordenone IT
T +39 0434 516216
F +39 0434 516230

ADMINISTRATIVE OFFICE

Corso Garibaldi, 86
20121 Milano IT
T +39 02 65560029
F +39 02 45498295