


Vitrum II BS Satellite Curtains and Shutters Control Wireless



Datasheet

cod. 01B020060

vitrum.com

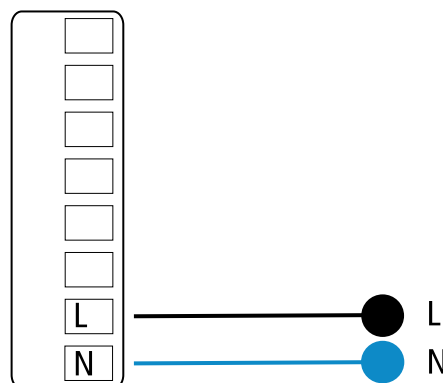

certified product

FUNCTIONAL SPECIFICATION

- Two-Button "Satellite" control to match with a power device (e.g. cod. 02E020010 or cod. 02B020010 or cod. 01D020030)
- Touch control with capacitive technology and concave surface for tactile Feedback
- Acoustic feedback signal
- Crown backlit by low-consumption LEDs

CARATTERISTICHE MECCANICHE

- Box British 1 Gang (wall or plasterboard)
- Dimension: 95x95mm
- Depth at sight: 8 mm
- Button Diameter: 16 mm
- Light ring diameter: 20 mm
- Weight: 210 g.

MODALITÀ DI COMANDO

- Two capacitive buttons with UP/DOWN or OPEN/CLOSE control
- Time of ascent and descent of the programmable shutter from 10s to 3m. Default: 50s
- Indication of motor drive: the device's LEDs flash
- Possibility to interpret the command "ALL OFF" total closure of the blinds
- You can associate up to 5 devices per channel

CARATTERISTICHE ELETTRICHE

- Power: 230V ac
- Energy consumption: < 1W
- Frequency of communication: F.M. 868.4MHz - R.F. radiated power <1mW
- R.F. Range: 20 m. MAX (open field)
- Operating Temperature 0° - 40° C

Built in compliant with:

E.M.C.: 2004/108/CE
R&TTE: 1999/5/CE

Think Simple s.r.l.

Size, color tone and characteristics of the products shown are only indicative and do not constitute any contractual bond. Think Simple s.r.l. reserves the right to modify its products at any time and without notice in order to better their quality and functionality.

HEAD OFFICE

Viale Lino Zanussi, 3
33170 Pordenone IT
T +39 0434 516216
F +39 0434 516230

ADMINISTRATIVE OFFICE

Corso Garibaldi, 86
20121 Milano IT
T +39 02 65560029
F +39 02 45498295