
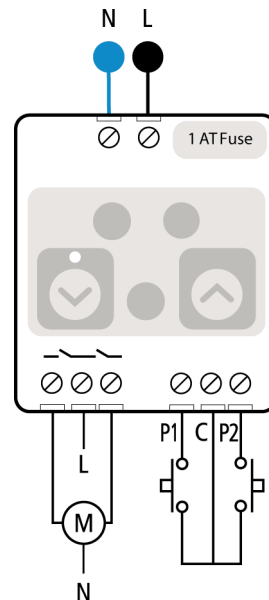


Modulo II DIN Control Shutters Wireless

Datasheet

cod. 01D020030

vitrum.com

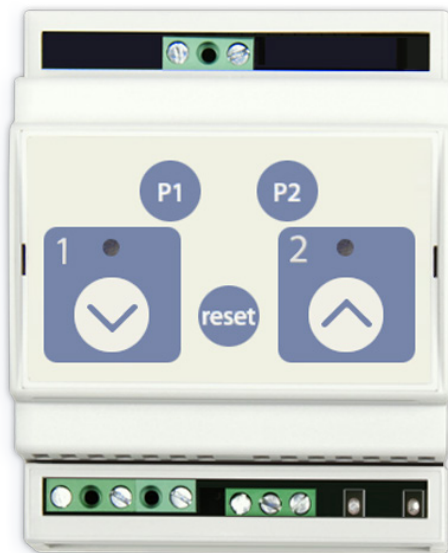

certified product

FUNCTIONAL SPECIFICATION

- Electronic device for control curtains or shutters.
- 2 buttons Mode
 - Control Up / Down
 - Open / Close
- Marked by leds:
 - 1: OFF color (BLUE)
 - 2: ON (Yellow)
- 2 buttons in the local "1" and "2" used for operation test

COMMAND MODE

- Remote: By R. F. in combination with other devices shutters vitrum satellites
- Local: 2 electromechanical buttons.

MECHANICAL CHARACTERISTICS

- Box Plastic PC / ABS - 4 DIN modules
- Installation - Din bar
- Dimensions: 92 x 75 mm
- Depth: H 62 mm
- Weight: 230g

ELECTRICAL CHARACTERISTICS

- Power supply: 230Vac 50Hz
- Power consumption: <1W
- Max load applicable: Engines: 3 A
- Operating temperature: -10 ° + 45 ° C
- Relative humidity: - 90%
- Storage temperature: - 40 ° C _ + 55 ° C
- Storage relative humidity: 10% _93%
- Protection: IP 20
- Communication protocol Wireless Zwave,
- Frequency of communication: F.M. 868.4MHz - R.F. radiated power <1mW
- R. F. Range: 20 m. MAX (open field)

Built in compliant with:

B.T.: 2006/95/CE

E.M.C.: 2004/108/CE

R&TTE : 1999/5/CE

Think Simple s.r.l.

Size, color tone and characteristics of the products shown are only indicative and do not constitute any contractual bond. Think Simple s.r.l. reserves the right to modify its products at any time and without notice in order to better their quality and functionality.

HEAD OFFICE

Viale Lino Zanussi, 3
33170 Pordenone IT
T +39 0434 516216
F +39 0434 516230

ADMINISTRATIVE OFFICE

Corso Garibaldi, 86
20121 Milano IT
T +39 02 65560029
F +39 02 45498295