

# Vitrum One Plus 0 - 10V


## Datasheet

### DESCRIPTION

Vitrum One Plus 0 - 10V is a Z-Wave Plus flush actuator for embedding or junction boxes, to be used in association with satellite buttons.

### TECHNICAL AND AESTHETIC SPECIFICATIONS

	A
Power supply	12 - 24 VDC*
Max. sinking control voltage	-20 / +20 VDC
Max. sourcing control voltage	0 - 11 VDC
Accuracy	<3% FS
Max. sinking current	2 mA
Max. sourcing current	7 mA
Digital temperature sensor range	-25°C~+80°C (-13~ 176°F), resolution 0.1°C
Operation temperature	-10° ~ +40°C (14 ~ 104°F)
Distance	up to 30 m indoors (98 ft)
Dimensions (WxHxD)	41.8 x 36.8 x 15.4 mm / 1,65x1,45x0,66 in
(packaging)	74 x 43 x 86 mm / 2,91x1,69x3,39 in
Weight (including packaging)	18 g (44 g) / 0.63oz (1.55oz)
Electricity consumption	0.5 W

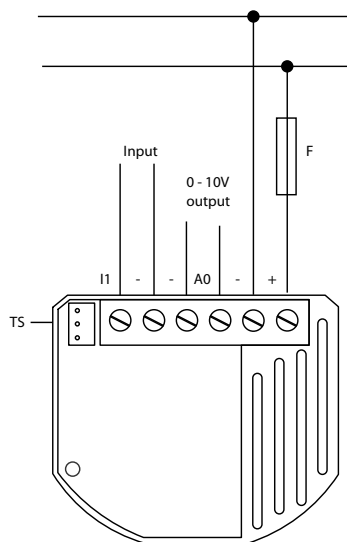

	Device	Code (Electronic)	Region	Frequencies
A	Vitrum One Plus Dimmer 0-10V	9000275	EU	868,4 MHz

