

# Vitrum One Plus RGBW Dimmer

## Datasheet


### DESCRIPTION

Vitrum One Plus RGBW Dimmer is a Z-Wave Plus flush actuator for embedding or junction boxes, to be used in association with satellite buttons.

### TECHNICAL AND AESTHETIC SPECIFICATIONS

	A
<b>Power Supply</b>	12 / 24V DC
<b>Reated load current of AC output (resistive load )</b>	8A for single output channel,13A at max.(3,25A for R.G.B.W. single output channel is suggested)
<b>PWM output frequency</b>	488Hz
<b>Max load (e.g. halogen bulbs)</b>	At 12V- 156W combined At 24V- 312W combined
<b>LED Indicator</b>	Red/Green *1
<b>Operation temperature</b>	0 ~40 (32 ~ 104°F)
<b>Distance</b>	up to 30 m indoors (98 ft)
<b>Dimensions (WxHxD)</b>	40.5 x 32 x 14.5 mm / 1,60x1,26x0,57 in
<b>Package dimensions (W x H x D)</b>	74 x 43 x 86 mm / 2,91x1,69x3,39 in
<b>Weight</b>	17 g / 0.60oz
<b>Gross weight (packaging included)</b>	43 g / 1.52oz
<b>For installation in boxes</b>	Ø ≥ 60 mm (2,36 in) or 2M (78,74 in),
<b>Z-Wave Repeater</b>	Yes

\*Warning: the Qubino RGBW dimmer operates at a low voltage (12VDC/24VDC). See the instructions in the manual.

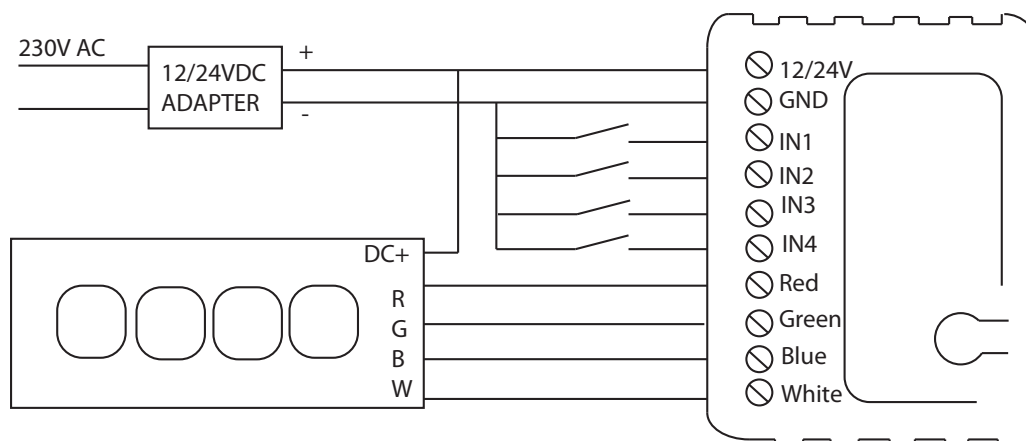

	Device	Code (Electronic)	Region	Frequencies
A	Vitrum One RGBW Dimmer	9000276	EU	868,4 MHz

