


# Vitrum I BS Master On-Off Unlimited

## Datasheet

cod. 03B010020

vitrum.com

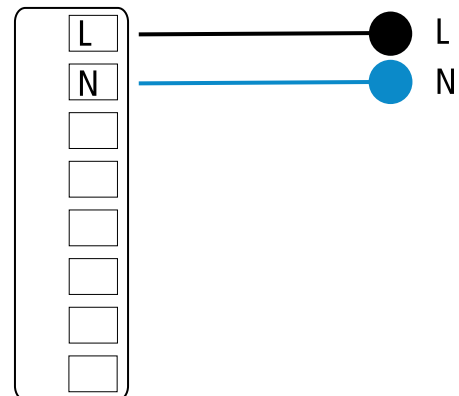

certified product

## FUNCTIONAL SPECIFICATION

- One-button switch to control "OFF" simultaneously of all Z-wave network's devices
- Touch control with capacitive technology and concave surface for tactile Feedback
- Acoustic feedback signal
- Crown backlit by low-consumption LEDs

## MECHANICAL CHARACTERISTICS

- Box British 1 Gang (wall or plasterboard)
- Dimension: 95x95mm
- Depth at sight: 8 mm
- Button Diameter: 38 mm
- Light ring diameter: 42 mm
- Weight: 180 g.

## COMMAND MODE

- 1 Capacitive sensor with "On-Off" control or release button
- There are available 5 associations with z-wave devices with a maximum of 4 switches each for a total control of (5 x 4 = 20) light circuits to handle a possible "welcome or inside the house" scenario (ON)
- Master "OFF" to all devices in the network

## ELECTRICAL CHARACTERISTICS

- Power: 230V ac ~ 50Hz
- Energy consumption: < 1W
- Frequency of communication: F.M. 868.4MHz - R.F radiated power < 1mW
- R.F. Range: 20 m. MAX (open field)
- Operating Temperature 0° - 40° C

**BE CAREFUL** you cannot associate 2 Master ON-OFF devices together

Built in compliant with:

**E.M.C.:** 2004/108/CE

**R&TTE:** 1999/5/CE

### Think Simple s.r.l.

Size, color tone and characteristics of the products shown are only indicative and do not constitute any contractual bond. Think Simple s.r.l. reserves the right to modify its products at any time and without notice in order to better their quality and functionality.

### HEAD OFFICE

Viale Lino Zanussi, 3  
33170 Pordenone IT  
T +39 0434 516216  
F +39 0434 516230

### ADMINISTRATIVE OFFICE

Corso Garibaldi, 86  
20121 Milano IT  
T +39 02 65560029  
F +39 02 45498295